

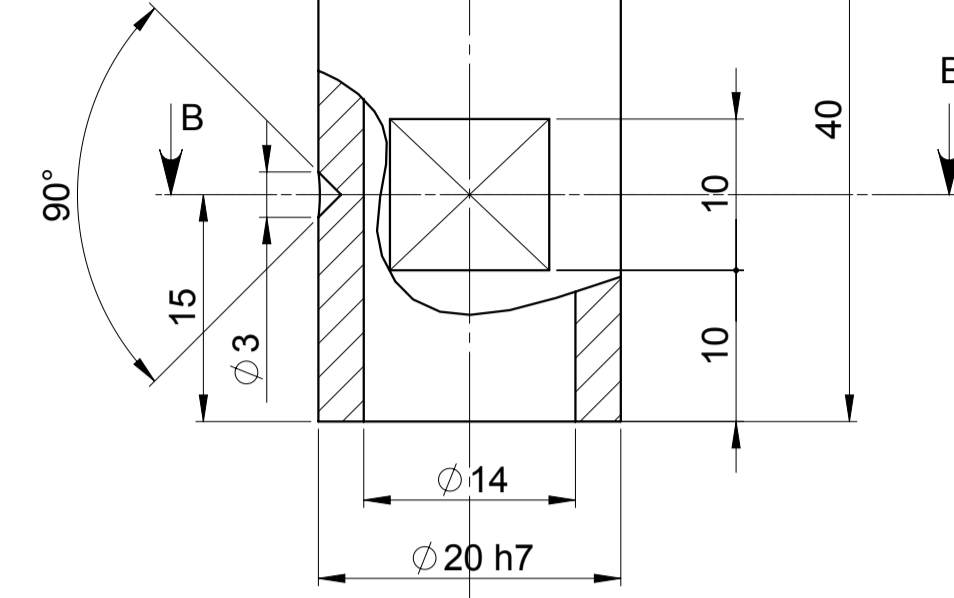


DETAIL A
SCALE 2:1

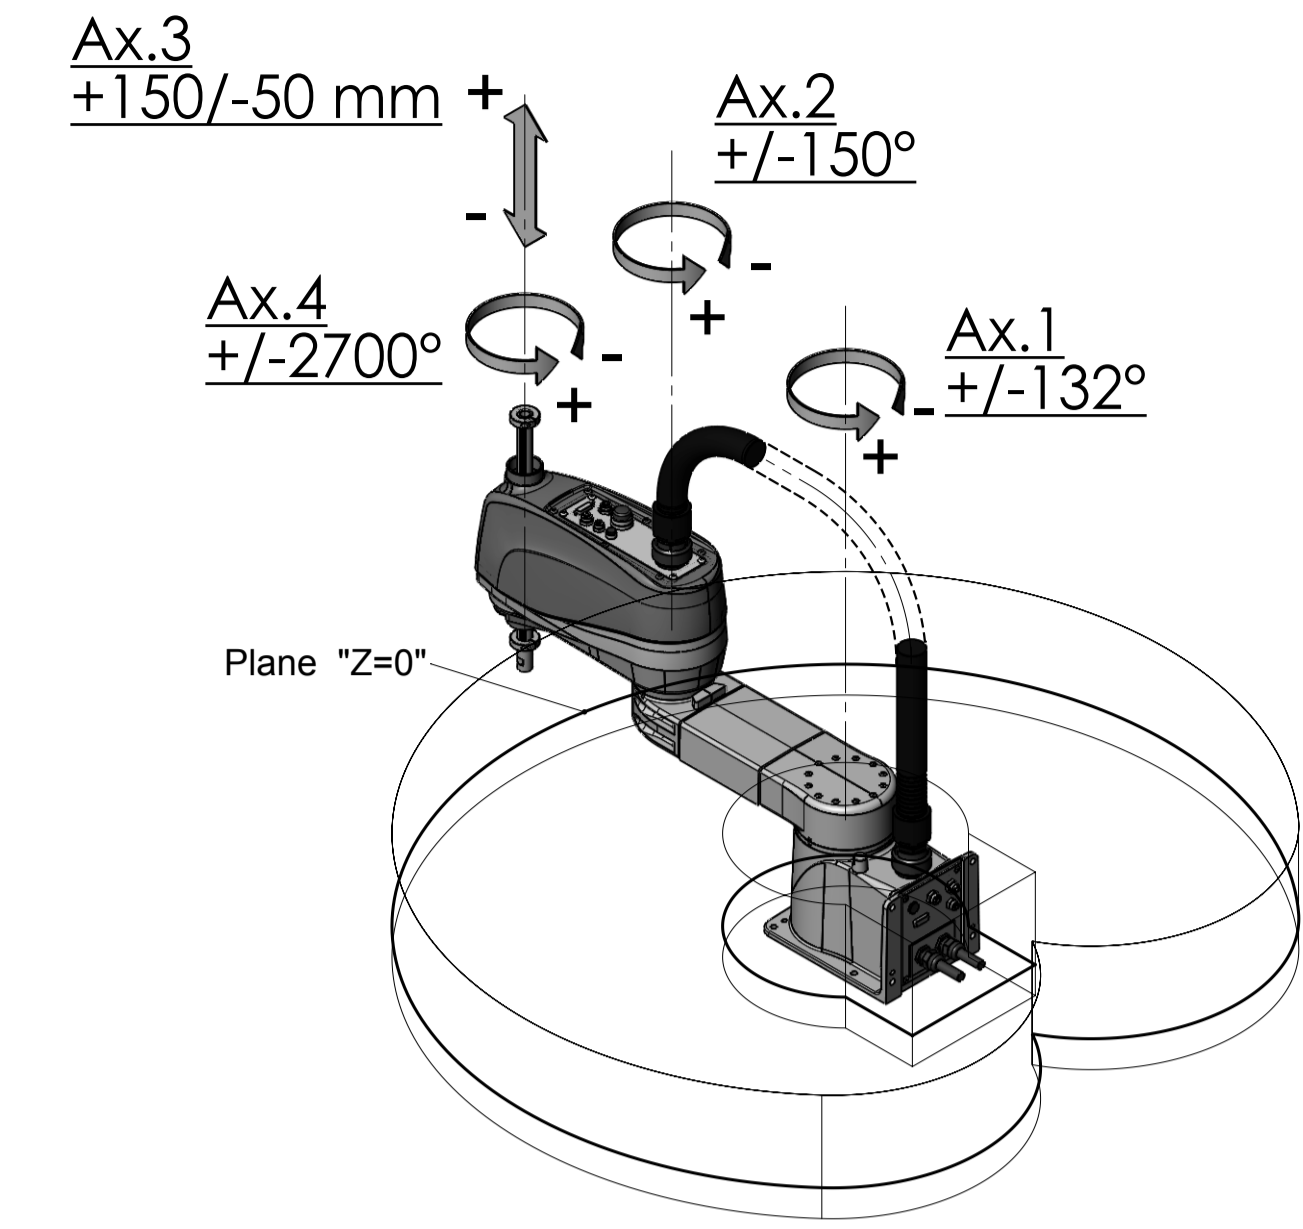

B-B
SCALE 2:1

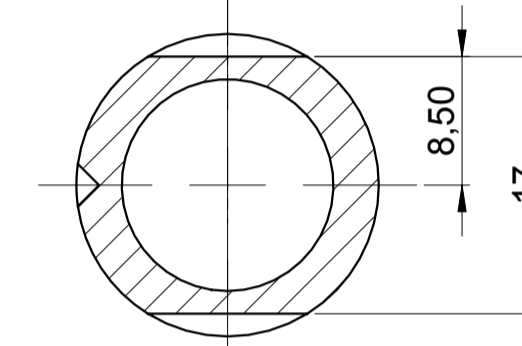


CALIBRATION POSITION					
X (mm)	Y (mm)	Z (mm)	Ax.1	Ax.2	
+600,000	0,000	+120,000	0°	0°	


WORKING AREA MAIN POINTS					
Pos.	X (mm)	Y (mm)	Z (mm)	Ax.1	Ax.2
0	+600,000	0,000	0,000	0°	0°
1	-401,478	-445,887	0,000	-132°	0°
2	-348,967	0,000	0,000	-132°	-109,433°
3	-240,000	-115,000	0,000	-100,050°	-128,153°
4	-114,991	-115,000	0,000	-77,274°	-150°
5	-114,991	+115,000	0,000	+77,274°	+150°
6	-240,000	+115,000	0,000	+100,050°	+128,153°
7	-348,967	0,000	0,000	+132°	+109,433°
8	-401,478	+445,887	0,000	+132°	0°

Maximum space


Center of joint #3

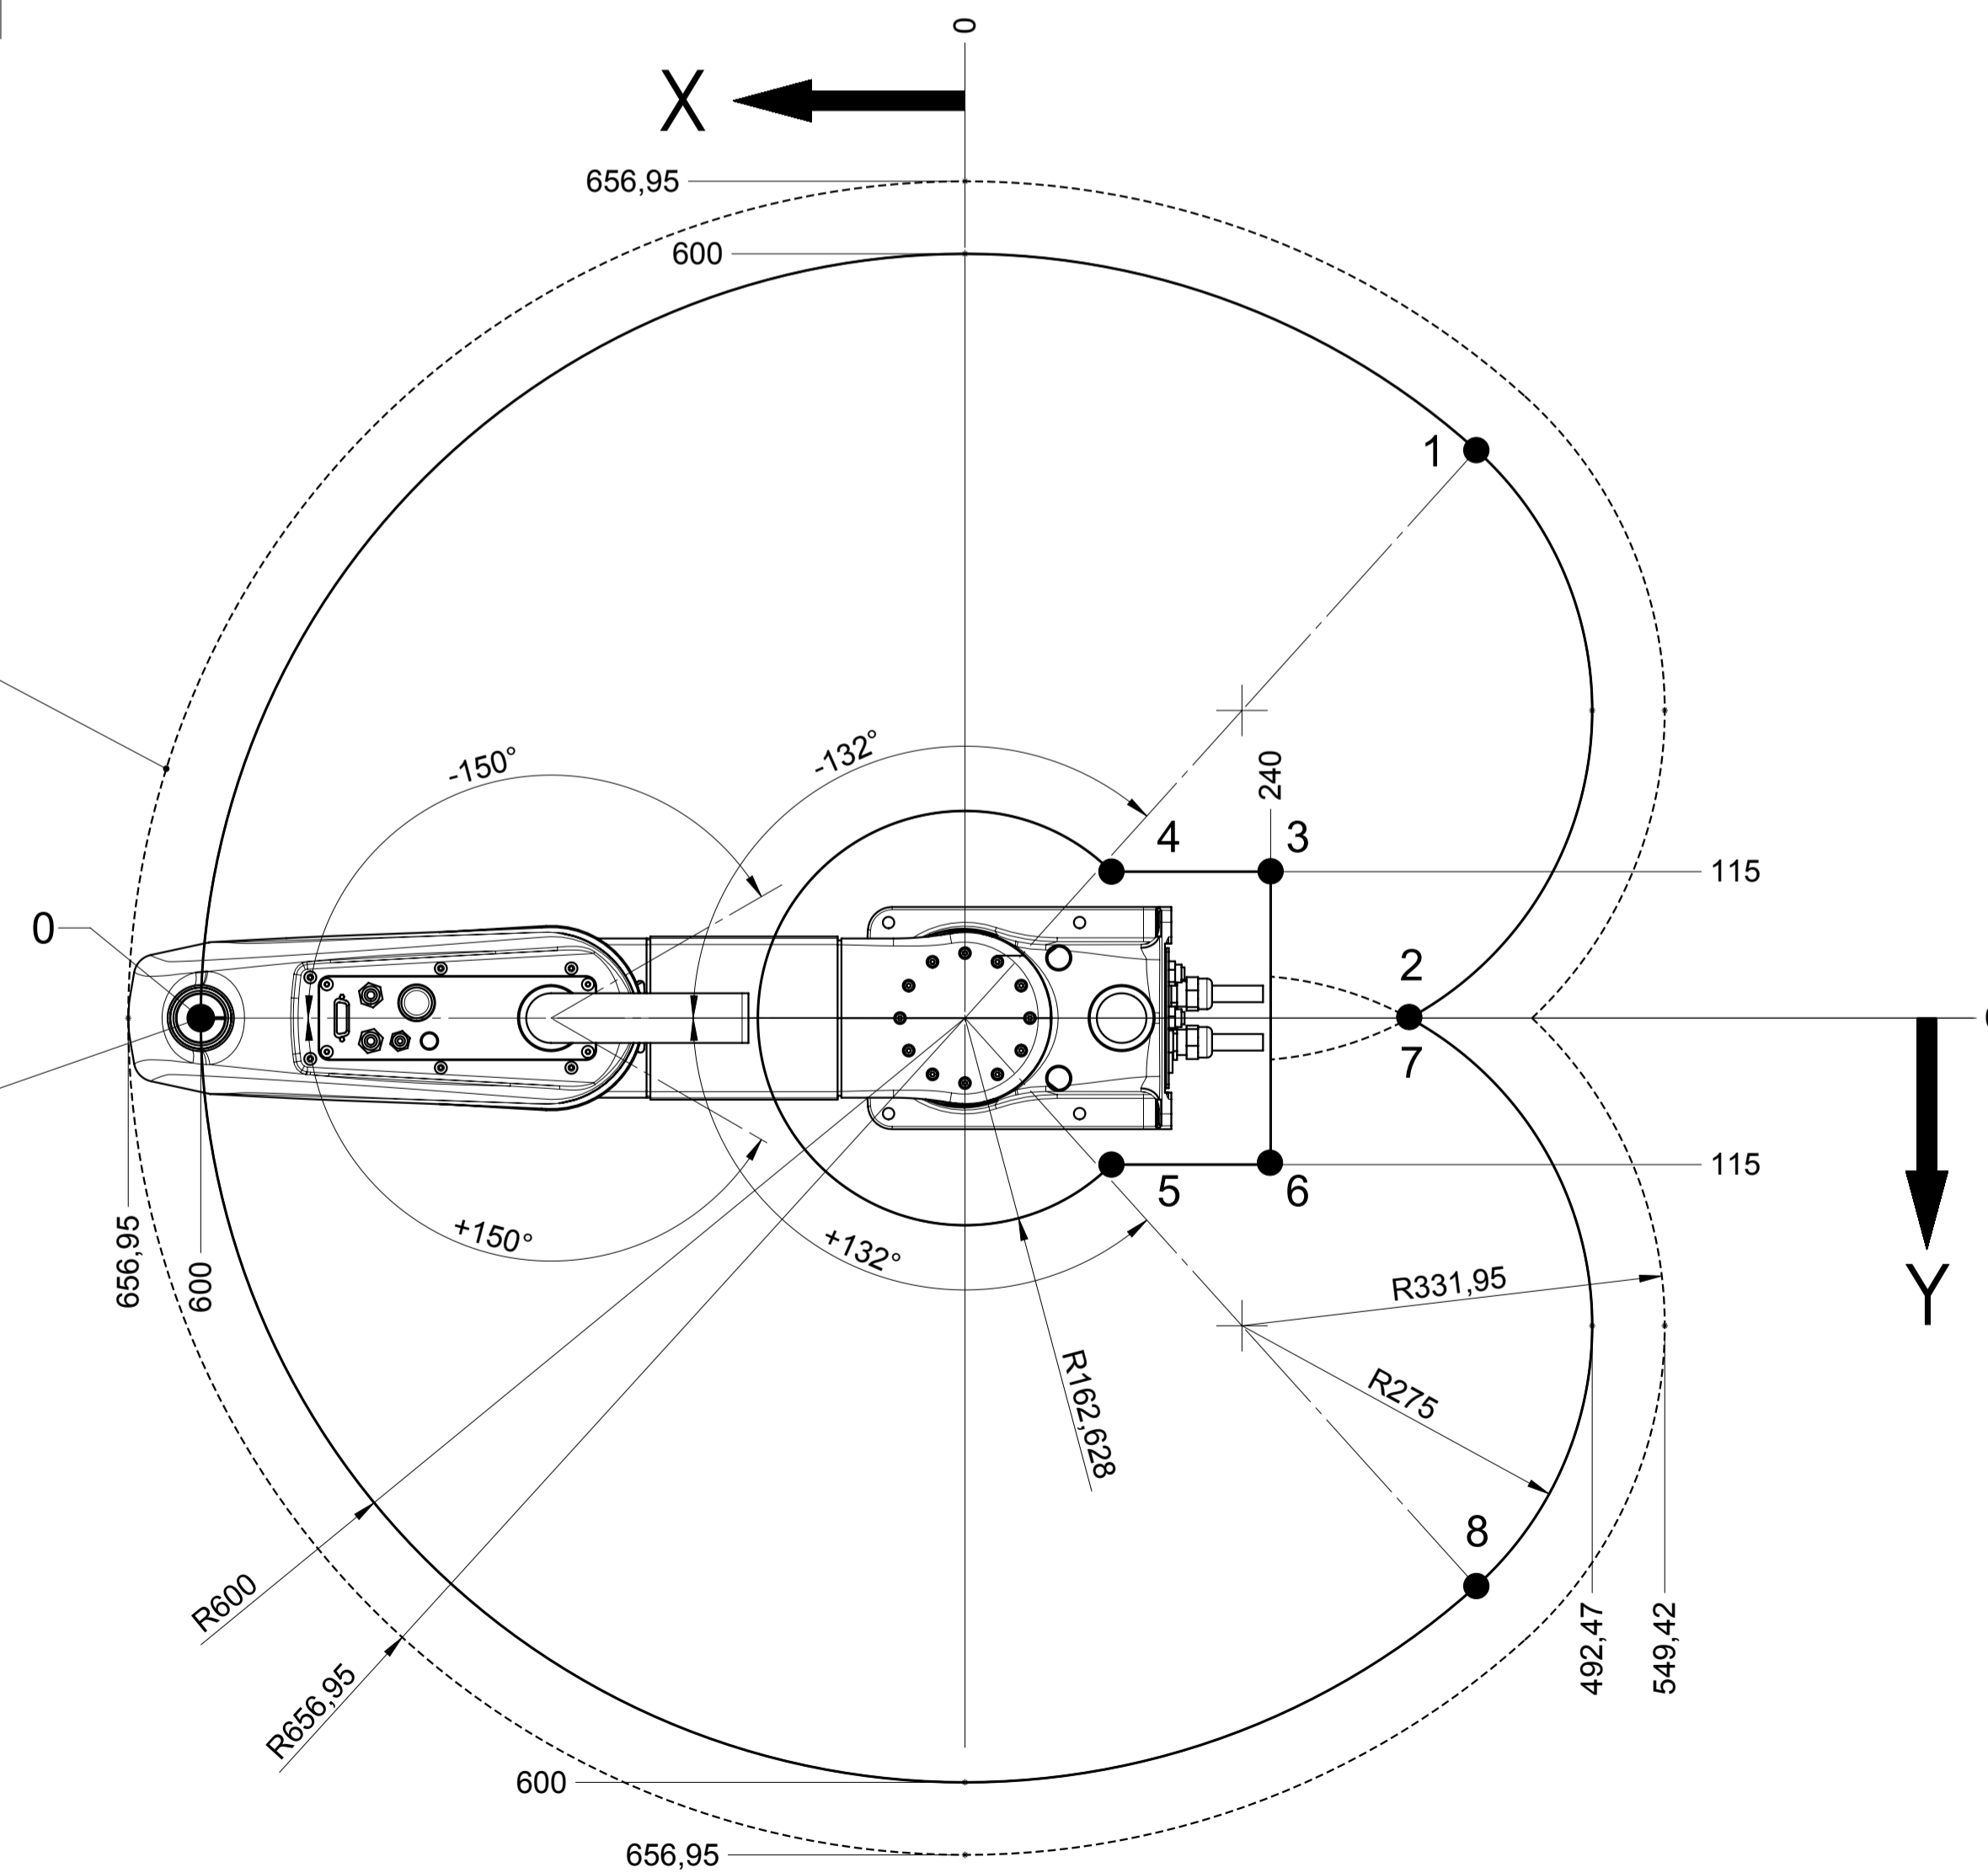

VIEW "D"
SCALE 1:2

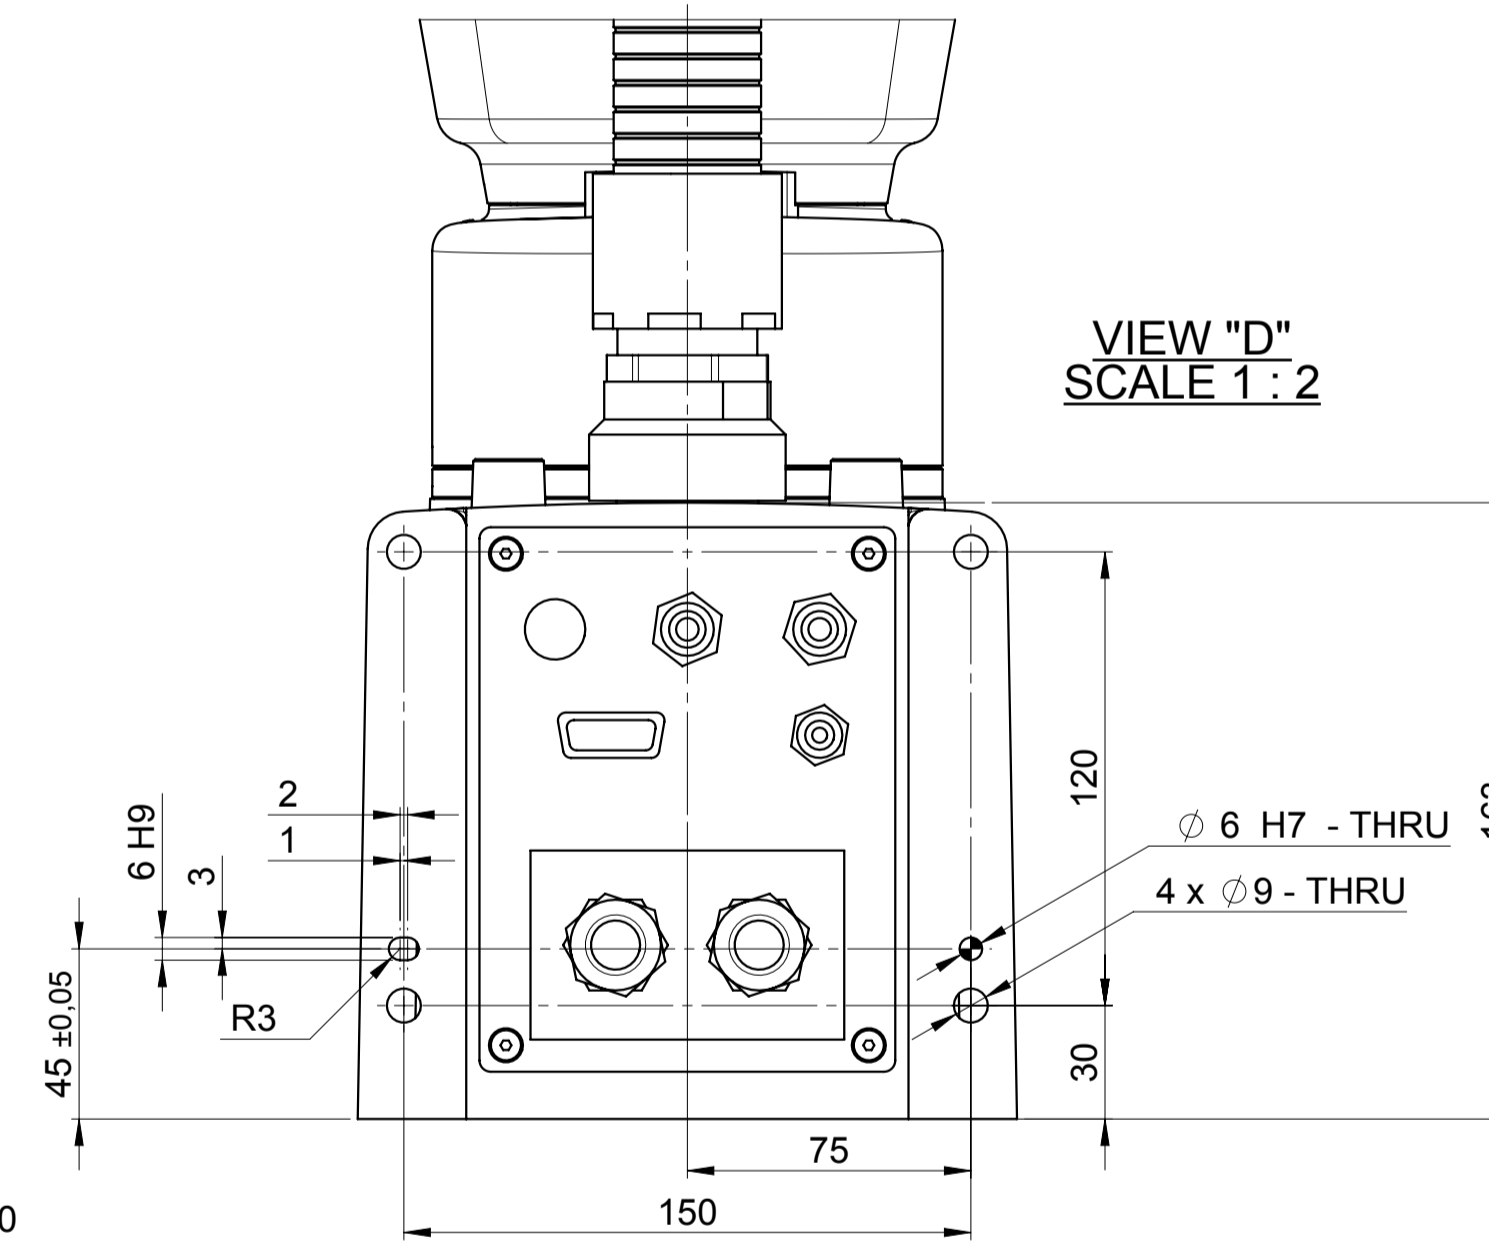

VIEW "C"
SCALE 1:2

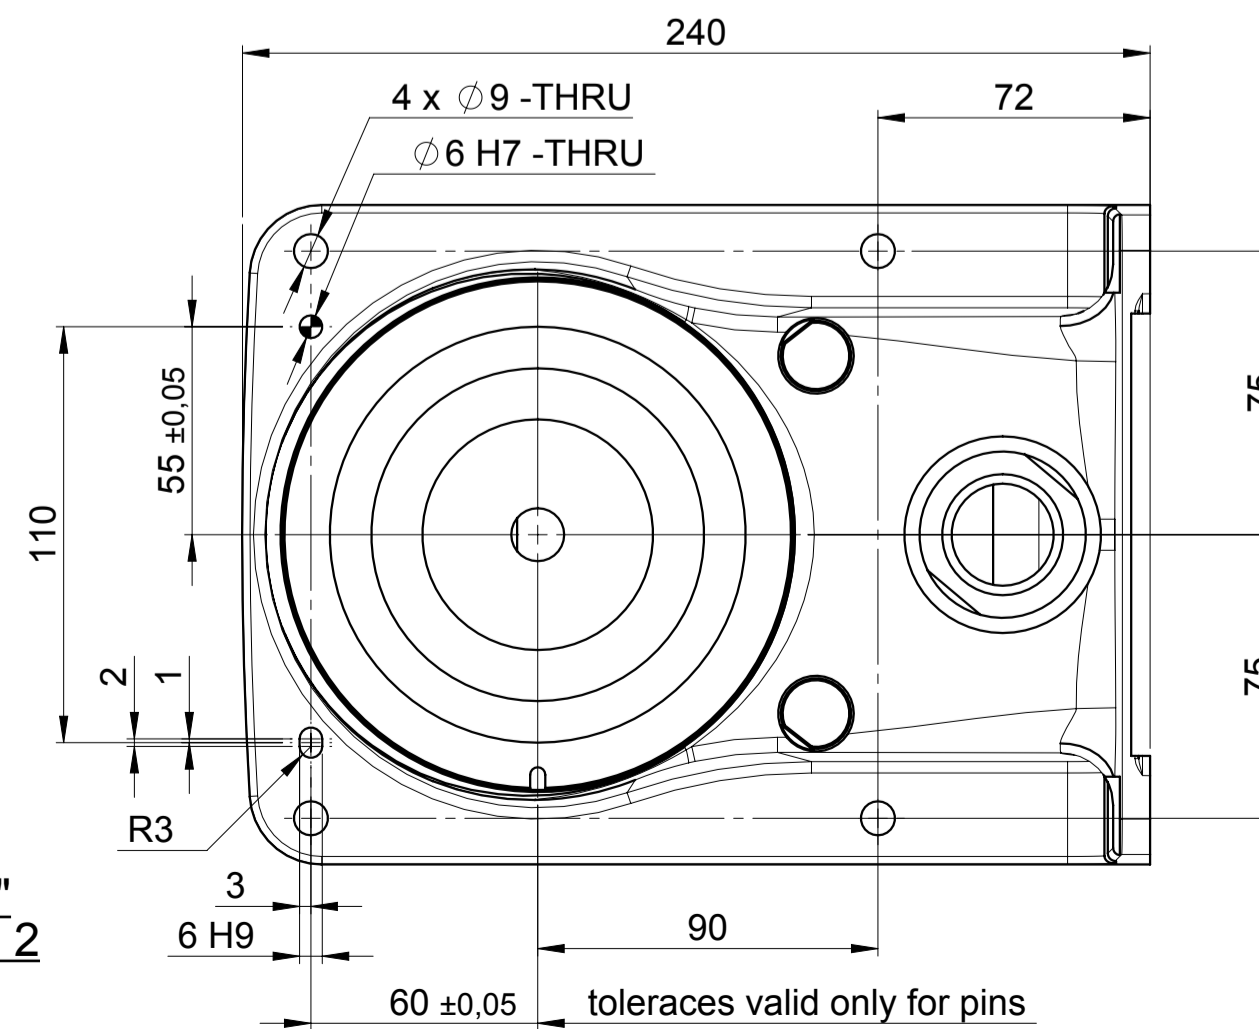

INDEX	DESCRIPTION	REVISION N.	AUTHOR	CHECKER	DATE
REVISIONS					
General surface texture	Material	Author	Pernechele/Hadine	Creation date	26/09/2016
Surface quality as per UNI ISO 1302 specification, where not differently specified	Heat treatment	Checker	Cingano	Released date	
Undimensioned edges	Hardness	Scale	1:5	Sheet N.	1/1
All details must be free of burrs and sharp edges which may be detrimental to satisfactory assembly, safe handling, or function	Surface treatment	Developed with CAD system software DO NOT MAKE MANUAL CHANGES		Geometric and position tolerances as per ISO 1101	
	Weight (Kg)	Dimensions without specified tolerances must follow standard ISO 2768-mk		Safety has been given consideration in this design	
	Casting model number				
This drawing is the property of COMAU S.p.A. and must not be used or copied without their permission	Spare part code	Manufacturing specifications			
	N				
DESCRIPTION					
WORKING AREA					
Rebel-S6-0.60					
DRAWING NUMBER					
CR82412400-LWA-00					
Customer drawing number Supplier drawing number					

